

SL-CP-RE
Terminal Block Series



- PA, Polyamide 66, 94-2 grade. Inflammation retarding, Working Temperature: -30°C to 110°C.
- Brass. Screw is iron plated zinc.
- Voltage: 250-450V.
- Color: according sample picture or customized.


SL-CP-RE



1. Specifications

Item No.	Spec. Wxh	Rated current (A)	Rated voltage (V)	L1	L2	H	W	Max. section	Hole Qty	Plastic setting
				mm						
207	6.5X12	125A	500V	67	48	50	45	35mm ²	2X7	PA
211	6.5X12	125A	500V	100	86	50	45	35mm ²	2X11	PA
215	6.5X12	125A	500V	134	118	50	45	35mm ²	2X15	PA
215	6.5X12	125A	500V	67	48	50	90	35mm ²	4X7	PA
407	6.5X12	125A	500V	100	86	50	90	35mm ²	4X11	PA
415	6.5X12	125A	500V	134	118	50	90	35mm ²	4X15	PA
413	8X17	160A	500V	180	168	73	138	50mm ²	4X13	PA

2. Dimensions

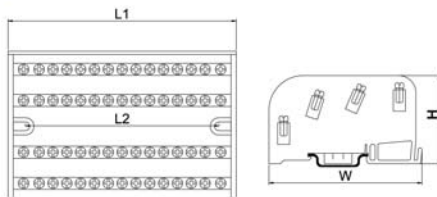

SL-CP-RE
Terminal Block Series

SL-CP-RE



1. Specifications

Item No.	Spec. Wxh	Rated current (A)	Rated voltage (V)	L1	L2	H	W	Max. section	Hole Qty	Plastic setting
				mm						
420	4X15	200A	500V	270	128	75	130	75mm ²	4X11	PA
425	5X20	250A	500V	270	128	75	130	100mm ²	4X11	PA
440	6X25	400A	500V	270	128	75	130	185mm ²	4X10	PA

2. Dimensions

