




SL-L2221-2P



SL-L2221-3P



SL-L2221-4P

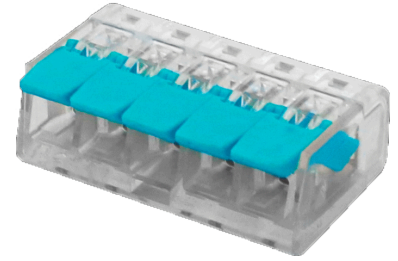

SL-L2221-5P

Connection data

Connection technology	Cage clamp
Actuation type	Lever
Connectable conductor materials	Copper
Nominal cross section	4 mm ²
Solid conductor	0.2...4 mm ² / 24 ... 12 AWG
Standed conductor	0.2...4 mm ² / 24 ... 12 AWG
Fine-standed conductor	0.14... 4 mm ² / 24 ... 12 AWG
Strip length	11 mm / 0.43 Inch
Total number of connection point	5
Total number of potentials	1
Type of wiring	Side-entry wiring

Geometrial Data

Width	29.9 mm / 1.177 Inch
Height	8,3 mm / 0.327 Inchn
Depth	18.6 mm / 0.732 Inchn

Material Data

Color	Transparent
Flammability Class per UL94	V2
Fire load	0.074 MJ
Weight	4.048 g

Environmental Requirements

Surrounding air (operating) temperature	85° C
Continuous operating temperature up to	105° C
T-Marking per EN 60998	T85