

DUNNA

Technical datasheet


Emergency Lighting
Ref. D-60L



UNE 60598-2-22
230V 50HZ

Emergency Lighting: DUNNA. Reference: D-60L, manufactured by Normalux. Lumens 60 lm. Autonomy (h) 1h. Operating mode: Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 3,6V/300mAh. IP: 44. IK: 07. Version: Standard. Color: White. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50Hz. Dimensions (mm): 322 x 120 x 45 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Dimensions (mm):

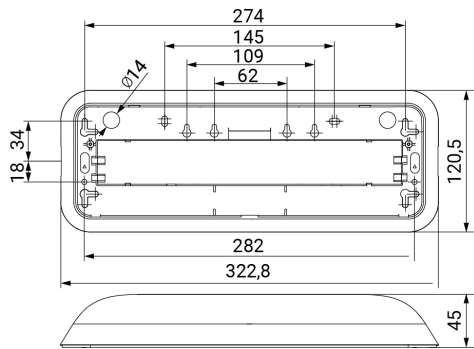

Lumens	60 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	1h
Battery	Ni-Cd 3,6V/300mAh
Charging	max. 24 h
Power (W)	0,4W
Operating mode	Non Maintained
Class	II
IP	44
IK	07
Operating temperature (°C)	5 to 35
Remote control	Yes

Photometric data:

