

PRO

PROFESSIONAL
2025

THE ESSENCE OF
LIGHT, NATURE & LIFE



MAGNETIC

Magnetic 48V



INDOOR

Magnetic | Caterpillar 48V. Light Integrated LED

I Linear System. Magnetic 48V



MOON 10
10W
jisoiluminacion.com



AXEL 05
5W
P. 84



AXEL 10
10W
P. 85



TEKNO 07
7W
P. 86



TEKNO 14
14W
P. 87



TEKNO 20
20W
jisoiluminacion.com



MAGDOT 15
15W
P. 89



LINEDOT 12
12W
P. 90



LINEDOT 20
20W
P. 91



LINEDOT 26
26W
P. 91



MILKY 12
12W
P. 92



MILKY 20
20W
P. 93



MILKY 30
30W
P. 93




CYLIN 5
5W
P. 94



CYLIN 10
10W
P. 95



CONNI 04
4W
P. 97



MOON 10P
10W
jisoiluminacion.com

INDOOR

Light Integrated LED. Caterpillar 48V | Magnetic

I Linear System. Magnetic 48V. Accessories



PENMAG
1/2/3m
P. 98



SURMAG
1/2m
P. 100



TRIMAG
1/2m
P. 102



RECMAG
1/2/3m
P. 104



POWER SUPPLY
External
P. 106



POWER SUPPLY
Integrated
P. 107



CONNECTOR
Corner CL
P. 98-100-102-104



CONNECTOR
Corner CP
P. 98-100-102-104



CONNECTOR
Corner CT
P. 98-100-102-104



CONNECTOR
Power Supply
P. 108



CONNECTOR
Junction
P. 108



CONNECTOR
Flexible
P. 108



COVER
P. 109



SUSPENSION
Acc
P. 109



CONNECTOR
Plate
P. 109



WIDE RANGE OF LUMINAIRES

Available 3000K / 4000K
Finishes Technical White / Black



AMPLIA GAMA DE LUMINARIAS

Disponible 3000K / 4000K
Acabados: Blanco Técnico y Negro

LOW VOLTAGE 48V

Colección de carriles de baja tensión de 48V con sistema Magnético, al que hemos añadido un sistema de fijación más complejo para evitar caídas. Colección funcional adaptable a espacios multifuncionales como restaurantes, tiendas y diferentes estancias. Nuevo sistema que podemos utilizar para instalaciones de superficie, empotradas, trimless y suspensión. Ofrecemos a los diseñadores múltiples opciones tanto de instalación, como una gran variedad de luminarias de diferentes potencias (desde 5W hasta 30W), que pueden ser reemplazadas en cualquier momento y también pueden ser alimentadas desde una única fuente de alimentación.

Collection of 48V low voltage Track system with Magnetic system, to which we have added a more complex fixing system to prevent falls. Functional collection adaptable to multifunctional spaces such as restaurants, shops and different rooms. New system that we can use for surface, recessed or trimless installations and suspension. We offer designers multiple options both in installation, as well as a great variety of luminaires of different powers (from 5W to 30W), which can be moved at any time and can also be powered from a single power source.


Collection de rails basse tension 48V avec un système magnétique, auquel nous avons ajouté un système de fixation plus complexe pour éviter les chutes. Collection fonctionnelle qui s'adapte aux espaces multifonctionnels tels que les restaurants, les magasins et les différentes pièces. Nouveau système pouvant être utilisé pour des installations en surface, encastrées, sans garniture et suspendues. Nous offrons aux concepteurs de multiples options d'installation, ainsi qu'une grande variété de luminaires de différentes puissances (de 5W à 30W), qui peuvent être remplacés à tout moment et qui peuvent également être alimentés par une seule Chip d'énergie.

NEW CLOSING SYSTEM

Combina varias luminarias con diferentes diseños y potencias en la misma instalación. Cambia la disposición de las luminarias sin cambiar la instalación.


Multiple luminaires with different designs and powers in the same installation. Change the arrangement of the luminaires without changing the installation.


Plusieurs luminaires de conception et de puissance différentes dans la même installation. Modifier la disposition des luminaires sans modifier l'installation.



LOCK

Después de fijar la luz al carril, asegúrese de que el bloqueo está en posición correcta
After fix the light to the track make sure the lock is on position
Après avoir fixé la lampe au rail, assurez-vous que la serrure est dans la bonne position.

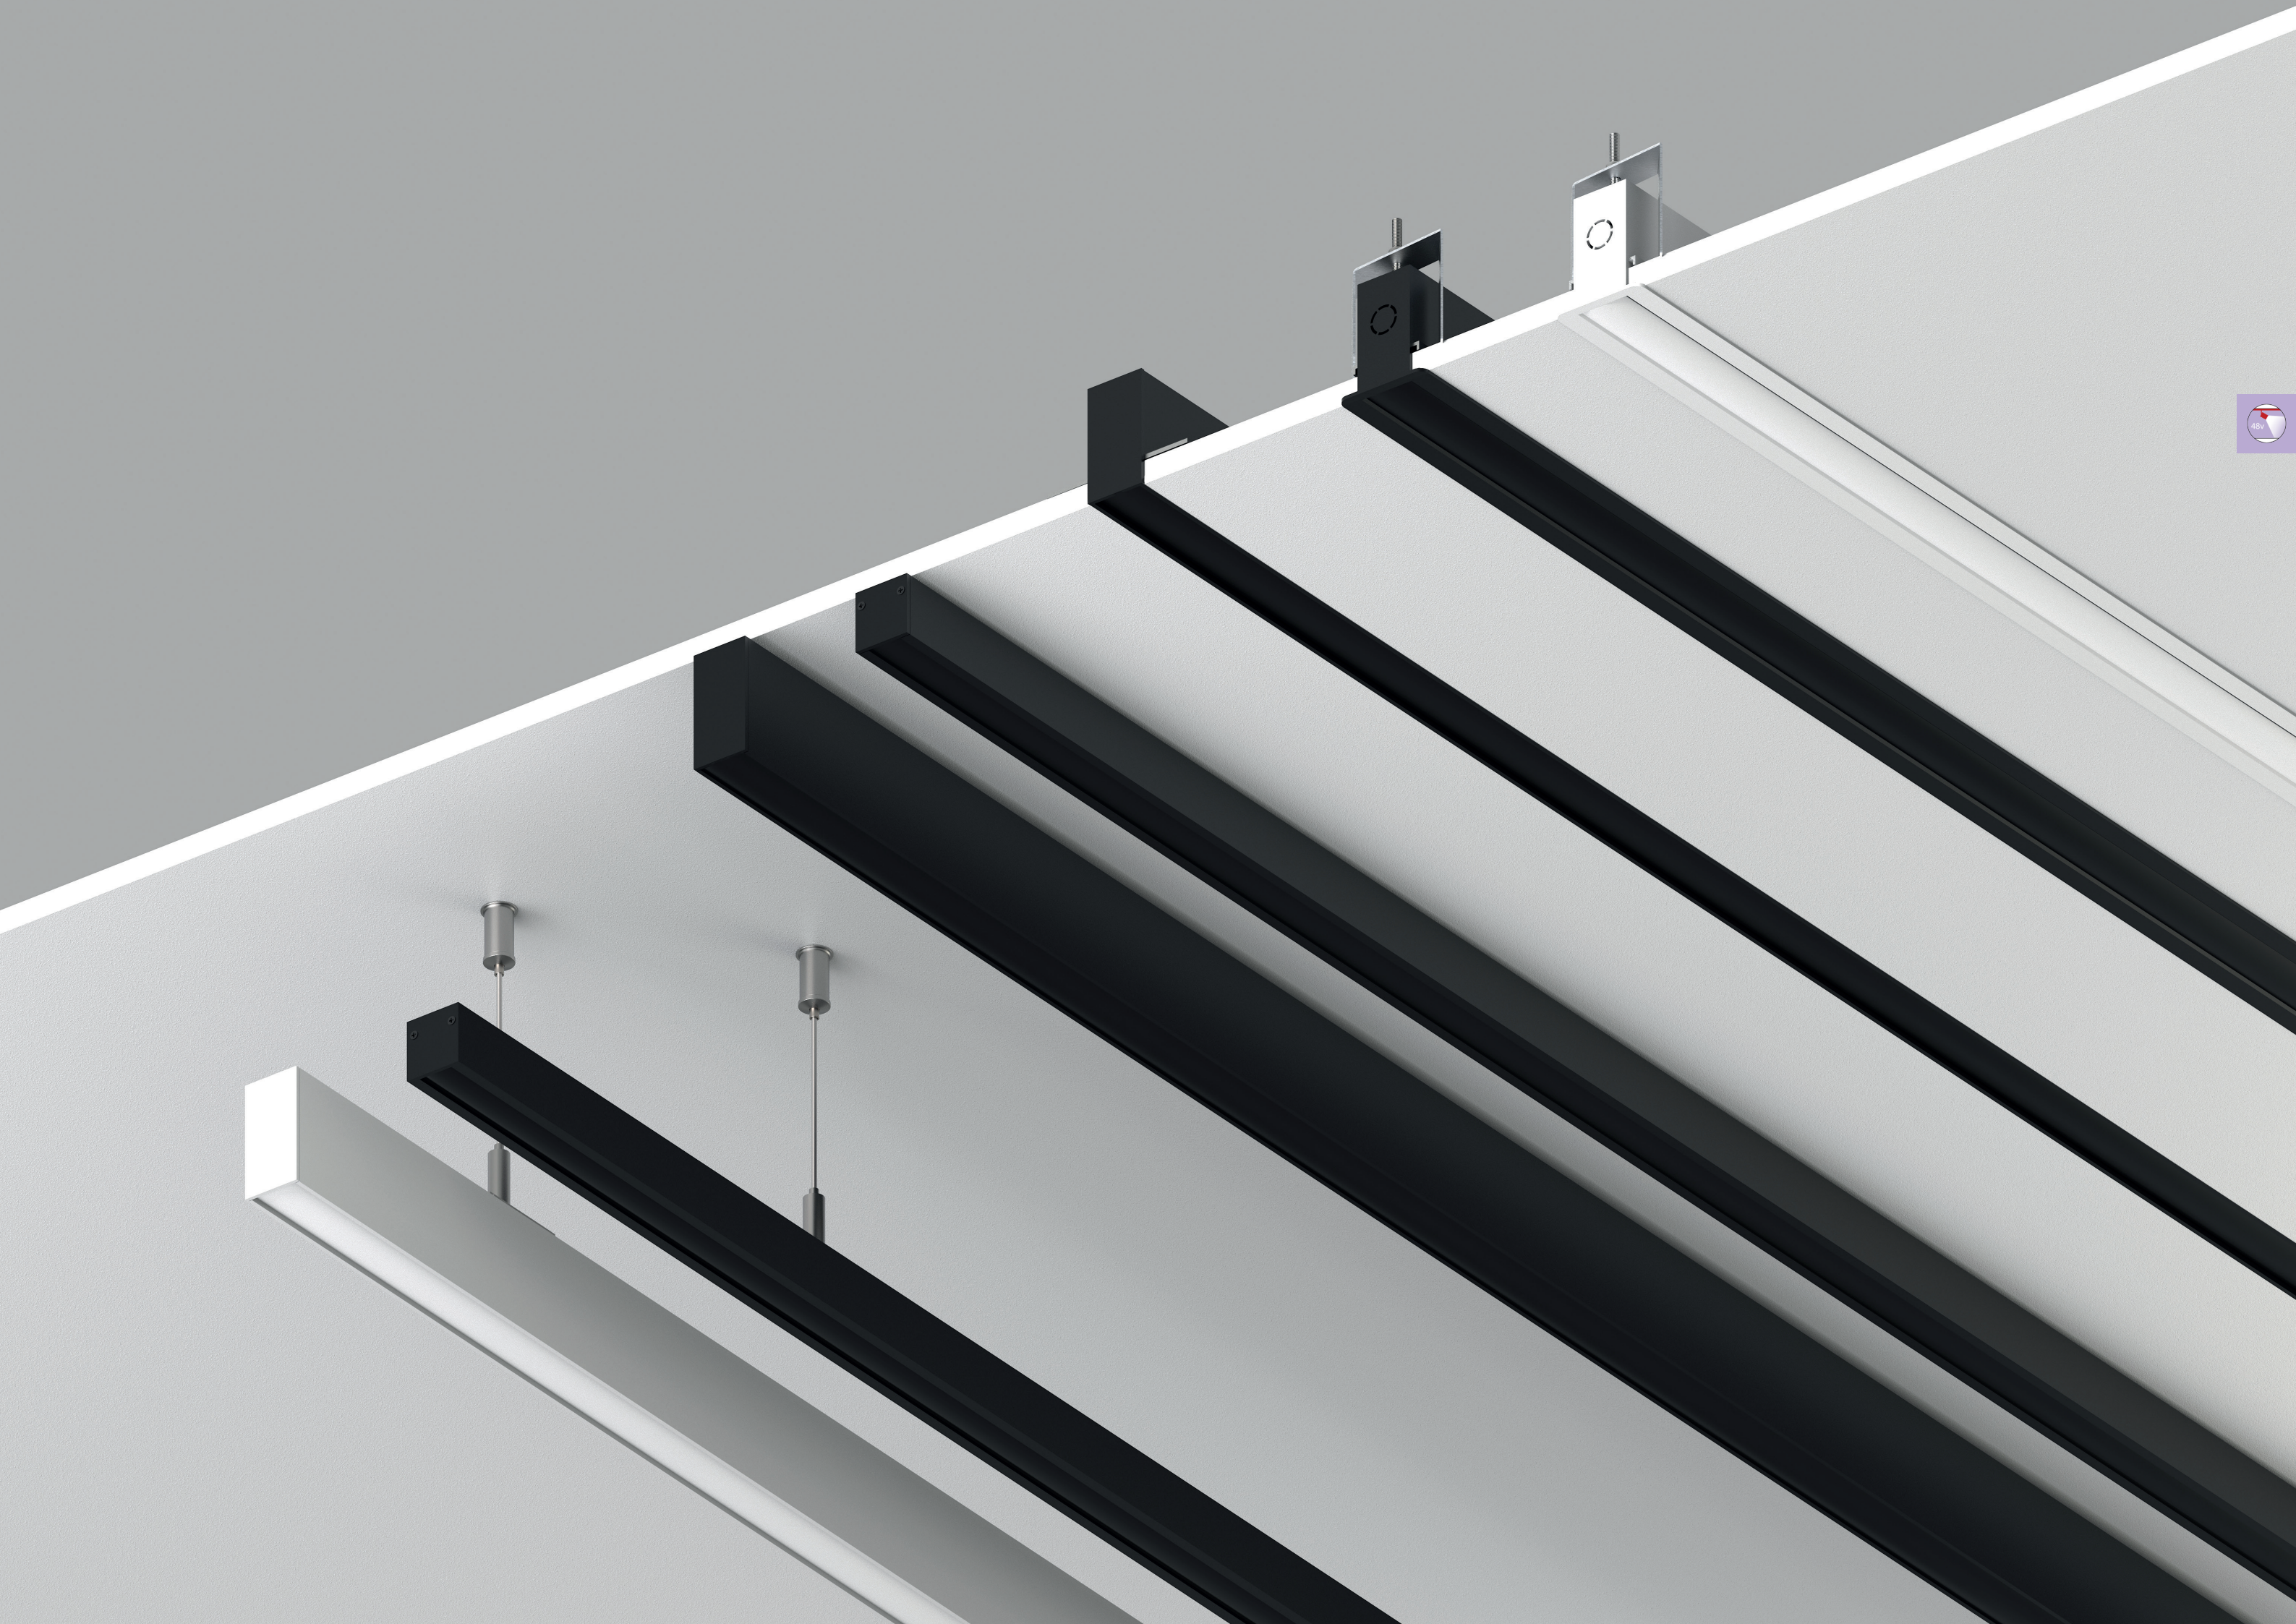




AXEL 05

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic

AXEL 10

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic



7IM701 05 - 20 M 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color	▼ Accessories Not included	
7IM701	05	20 - ON-OFF Not included	M - 38°	3 - 3000 415 Lm System 661 Lm Chip	01 Black / Negro / Noir	Optics	
						HC7ILENS50-A	15°
						HC7ILENS50-I	24°
						HC7ILENS50-E	60°

LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 132lm/W - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)


7IM701 10 - 20 M 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color	▼ Accessories Not included	
7IM701	10	20 - ON-OFF Not included	M - 38°	3 - 3000 830 Lm System 1353 Lm Chip	01 Black / Negro / Noir	Optics	
						HC7ILENS50-A	15°
						HC7ILENS50-I	24°
						HC7ILENS50-E	60°

LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 132lm/W - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)




TEKNO 07

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic

TEKNO 14

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic

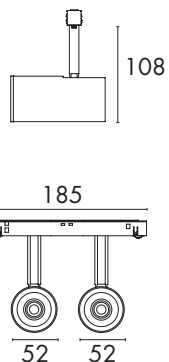

7IM702 07 - 20 M 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color	▼ Accessories Not included	
7IM702	7	20 - ON-OFF Not included	M - 38°	3 - 3000 841 Lm System 947 Lm Chip	01 Black / Negro / Noir	Optics	
		40 - DALI Not included		4 - 4000 883 Lm System 967 Lm Chip	90 T. White / ^Blanco T. / Blanc T.		
						HC7ILENS50-A	15°
						HC7ILENS50-I	24°
						HC7ILENS50-E	60°

LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 118lm/W (4000K) - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)

7IM702 14 - 20 M 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color	Optics	
7IM702	14	 20 - ON-OFF Not included	M - 38°	3 -  3000 1682 Lm System 1894 Lm Chip	 01 Black / Negro / Noir	HC7ILENS50-A	15°
						HC7ILENS50-I	24°
						HC7ILENS50-E	60°

LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 116lm/W - RG1




Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)



MAGDOT 15

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic




7IM707 15 - 20 M 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM707	15	20 - ON-OFF Not included 40 - DALI Not included	M - 38°	3 - 3000 878 Lm System 1980 Lm Chip	01 Black / Negro / Noir 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD - CRI>90 - L70B10 / 50.000H - 132lm/W - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)



LINEDOT 12

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic




7IM704 12 - 20 W 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM704	12	20 - ON-OFF Not included 40 - DALI Not included	W - 50°	3 - 3000 859 Lm System 1426 Lm Chip 4 - 4000 902 Lm System 1501 Lm Chip	01 Black / Negro / Noir 90 T. White / Blanco T. / Blanc T.

LED CHIP: SMD - CRI>90 - L70B10 / 50.000H - 139lm/W (4000K) - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)



LINEDOT 20


Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic

7IM704 20 - 20 W 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM704	20	20 - ON-OFF Not included 40 - DALI Not included	W - 50°	3 - 3000 1452 Lm System 2376 Lm Chip	01 Black / Negro / Noir

LINEDOT 26

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic



7IM704 26 - 20 W 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM704	26	20 - ON-OFF Not included 40 - DALI Not included	W - 50°	3 - 3000 1947 Lm System 3564 Lm Chip	01 Black / Negro / Noir


LED CHIP: SMD - CRI>90 - L70B10 / 50.000H - 132lm/W - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)

MILKY 12

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic

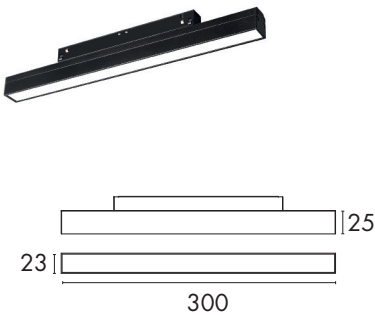

7IM703 12 - 20 T 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM703	12	20 - ON-OFF Not included 40 - DALI Not included	T - 110°	3 - 3000 460 Lm System 1413 Lm Chip	01 Black / Negro / Noir


LED CHIP: SMD - CRI>90 - L70B10 / 50.000H - 117lm/W - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)

MILKY 20

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic

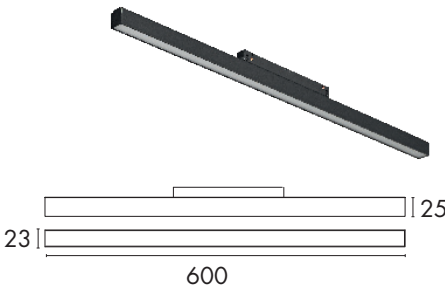


7IM703 20 - 20 T 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM703	20	20 - ON-OFF Not included 40 - DALI Not included	T - 110°	3 - 3000 742 Lm System 2355 Lm Chip 4 - 4000 779 Lm System 2577 Lm Chip	01 Black / Negro / Noir 90 T. White / Blanco T. / Blanc T.

MILKY 30

Luminaria LED Magnetic
LED Magnetic Luminaire
Luminaire LED Magnetic

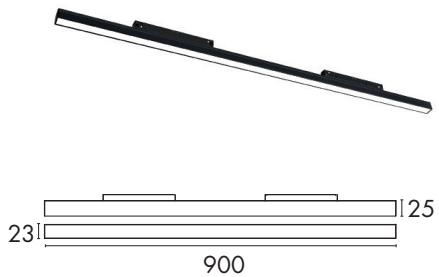


7IM703 30 - 20 T 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM703	30	20 - ON-OFF Not included 40 - DALI Not included	T - 110°	3 - 3000 1006 Lm System 3533 Lm Chip 4 - 4000 1056 Lm System 3865 Lm Chip	01 Black / Negro / Noir

LED CHIP: SMD - CRI>90 - L70B10 / 50.000H - 128lm/W (4000K) - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)

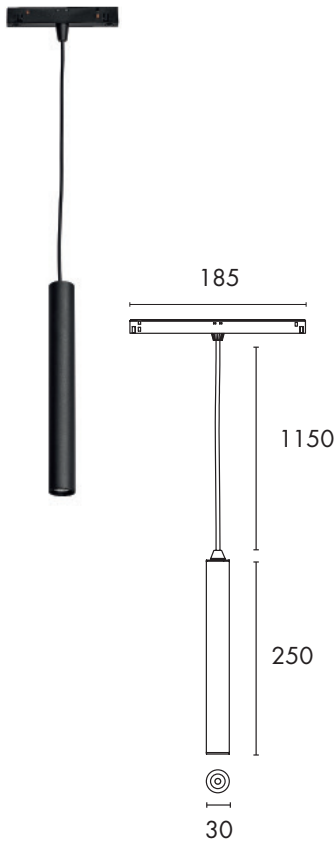

CYLIN 05

Luminaria LED Magnetic Suspensión
LED Magnetic Suspension Luminaire
Luminaire LED Magnetic en Suspension



7IM706 05 - 20 N 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM706	5	20 - ON-OFF Not included 40 - DALI Not included	N - 45°	3 - 3000 323 Lm System 661 Lm Chip	01 Black / Negro / Noir


LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 132lm/W - RG1



Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)

CYLIN 10

Luminaria LED Magnetic Suspensión
LED Magnetic Suspension Luminaire
Luminaire LED Magnetic en Suspension

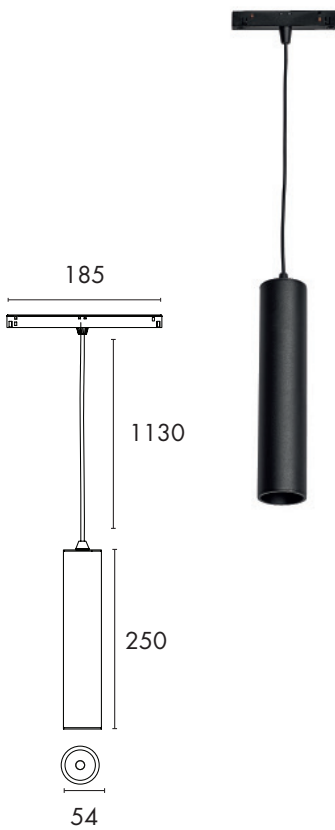

7IM706 10 - 20 M 3 - 01

1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
7IM706	10	20 - ON-OFF Not included 40 - DALI Not included	M - 38°	3 - 3000 734 Lm System 1353 Lm Chip	01 Black / Negro / Noir

▼ Accessories Not included	
Optics	
HC7ILENS50-A	15°
HC7ILENS50-I	24°
HC7ILENS50-E	60°

LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 135lm/W - RG1




Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminación.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)



CONNI 04

Luminaria LED Magnetic Suspensión
LED Magnetic Suspension Luminaire
Luminaire LED Magnetic en Suspension

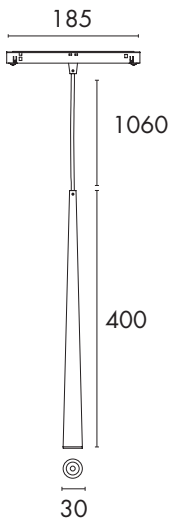

71M709 04 - 20 N 3 - 01
1 2 3 4 5 6







1 - Model	2 - W	3 - Power Supply	4 - Degree	5 - K	6 - Color
71M709	4	20 - ON-OFF Not included 40 - DALI Not included	N - 45°	3 - 3000 399 Lm System 450 Lm Chip	01 Black / Negro / Noir 90 T. White / Blanco T. / Blanc T.


LED CHIP: COB - CRI>90 - L70B10 / 50.000H - 125lm/W - RG1









Para más información consultar página web / For more information see website / Pour plus d'informations, consultez le site web
For general enquiries - www.jisoiluminacion.com (Download - Technical Information)
See Driver configuration instructions - page 602
See instructions for Dimmable Trailing Edge, 1-10V, DALI and Push Driver - www.jisoiluminacion.com (Download - Technical Information)


PENMAG

1		7IM20210-01 1m. Surface/Pendant Magnetic track. Black/Negro / Noir 7IM20210-90 1m. Surface/Pendant Magnetic track. T. White/Blanco T./Blanc T. 7IM20220-01 2m. Surface/Pendant Magnetic track. Black/Negro / Noir 7IM20220-90 2m. Surface/Pendant Magnetic track. T. White/Blanco T./Blanc T. 7IM20230-01 3m. Surface/Pendant Magnetic track. Black/Negro / Noir	End Cap withouth hole (Included 2 pz)	
2		7IM202CL-01 Magnetic System track Low Voltage 48V. 7IM202CL-90 Corner connector included.	01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T.	
3		7IM202CP-01 Magnetic System track Low Voltage 48V. 7IM202CP-90 Corner connector included.	01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T.	
4		7IM202CT-01 Magnetic System track Low Voltage 48V. 7IM202CT-90 Corner connector included.	01 - Black/ Negro / Noir 90 - T. White/Blanco T./Blanc T.	
5		7IM202T1-01 End Cap withouth hole 7IM202T1-90	01 - Negro / Noir 90 - T. White/Blanco T./Blanc T.	
6		7IM7PS00-01 Power supply CONNECTOR (page 108) 7IM7PS00-90	01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T.	
7		7IM7MC00-01 CONNECTOR juction (page 108) 7IM7MC00-90	01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T.	
8		7IM7EN00-01 Pletina Connector (page 109)	01 - Black/Negro / Noir	
9		7IM4PC00-01 Suspension Acc. Without Wire 7IM4PC00-90 7IM4PC01-01 Suspension Acc. Wire ON/OFF 7IM4PC01-90 7IM4PCD1-01 Suspension Acc. Wire DALI 7IM4PCD1-90 (page	01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T. 01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T. 01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T.	1.5m Length -3M. 3m Length 1.5m Length -3M. 3m Length 1.5m Length -3M. 3m Length
		7IM7TC10-01 Cover 1m 7IM7TC10-90 (page 109)	01 - Black/Negro / Noir 90 - T. White/Blanco T./Blanc T.	
		3100-2212-048V Power supply External 3150-2212-048V 3250-2212-048V (page 106)	100W 150W 250W	
		3100-1248V 3100-1248V-90 3150-1248V 3150-1248V-90 3230-1248V 3230-1248V-90 Power supply Integrated (page 107)	100W 150W 230W Black/Negro / Noir 90 - T. White/Blanco T./Blanc T.	





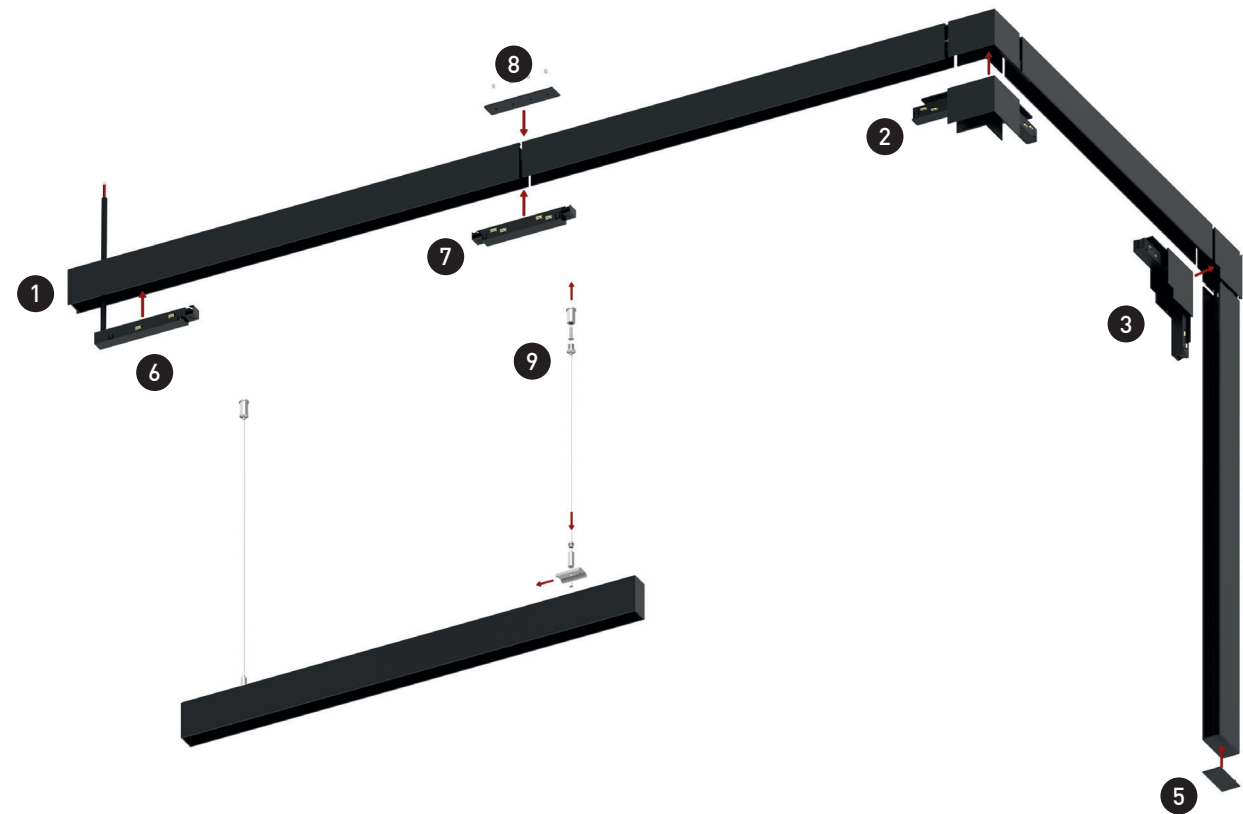




SURMAG

1		7IM20110-01 1m. Surface/Pendant Magnetic track. Black/Negro / Noir 7IM20120-01 2m. Surface/Pendant Magnetic track. Black/Negro / Noir	End Cap withouth hole (Included 2 pz)	
2		7IM201CL-01 Magnetic System track Low Voltage 48V. Corner connector included.	01 - Black/Negro / Noir	
3		7IM201CP-01 Magnetic System track Low Voltage 48V. Corner connector included.	01 - Black/Negro / Noir	
4		7IM201CT-01 Magnetic System track Low Voltage 48V. Corner connector included.	01 - Black/Negro / Noir	
5		7IM201T1-01 End Cap withouth hole	01 - Black/Negro / Noir	
6		7IM7PS00-01 Power supply Connector (page 108)	01 - Black/Negro / Noir	
7		7IM7MC00-01 Connector iunction (page 108)	01 - Black/Negro / Noir	
8		7IM7EN00-01 Connector plate (page 109)	01 - Black/Negro / Noir	
9		7IM4PC00-01 Suspension Acc. Without Wire 7IM4PC01-01 Suspension Acc. Wire ON/OFF 7IM4PCD1-01 Suspension Acc. Wire DALI (page 109)	01 - Black/Negro / Noir 01 - Black/Negro / Noir 01 - Black/Negro / Noir	1.5m Length -3M. 3m Length 1.5m Length -3M. 3m Length 1.5m Length -3M. 3m Length
		7IM2TC10-01 Cover (page 109)	01 - Black/Negro / Noir	
		3100-2212-048V 3150-2212-048V 3250-2212-048V Power supply External (page 106)	100W 150W 250W	
		3100-1248V 3150-1248V 3230-1248V Power supply Integrated (page 107)	100W 150W 230W Black/Negro / Noir	





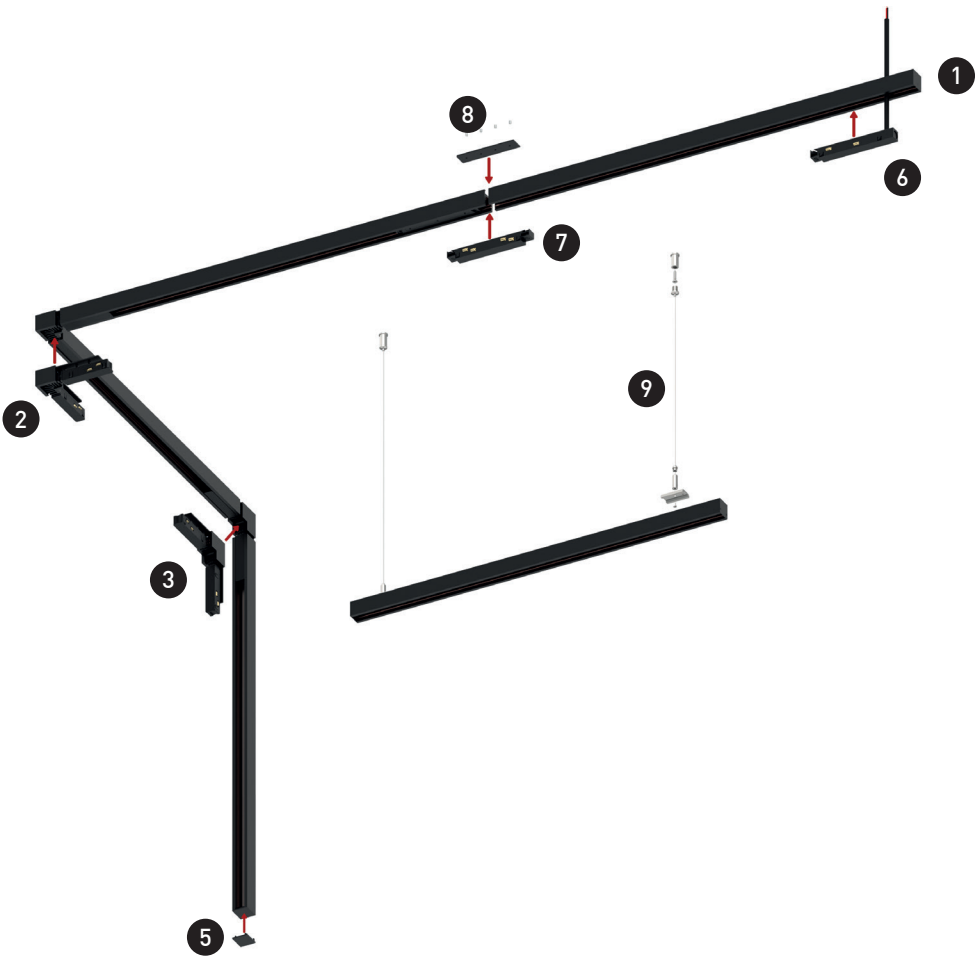




TRIMAG

1		7IM60110-01 1 m. Recessed Trimless Magnetic track. Black/Negro/Noir 7IM60120-01 2 m. Recessed Trimless Magnetic track. Black/Negro/Noir	End Cap withouth hole (Included 2 pz)	
2		7IM601CL-01 Magnetic System track Low Voltage 48V. Corner connector included.	01 - Black/Negro/Noir	
3		7IM601CP-01 Magnetic System track Low Voltage 48V. Corner connector included.	01 - Black/Negro/Noir	
4		7IM601CT-01 Magnetic System track Low Voltage 48V. Corner connector included.	01 - Black/Negro/Noir	
5		7IM202T1-01 End Cap without hole	01 - Black/Negro/Noir	
6		7IM7PS00-01 Power supply Connector (page 108)	01 - Black/Negro/Noir	
7		7IM7MC00-01 Juction Connector (page 108)	01 - Black/Negro/Noir	
8		7IM7EN00-01 Plate Connector (page 109)	01 - Black/Negro/Noir	
		7IM7TC10-01 Cover 1 m (page 109)	01 - Black/Negro/Noir	
		3100-2212-048V Power supply External (page 106) 3150-2212-048V 3250-2212-048V	100W 150W 250W	
		3100-1248V Power supply Integrated (page 107) 3150-1248V 3230-1248V	100W 150W 230W	Black/Negro/Noir

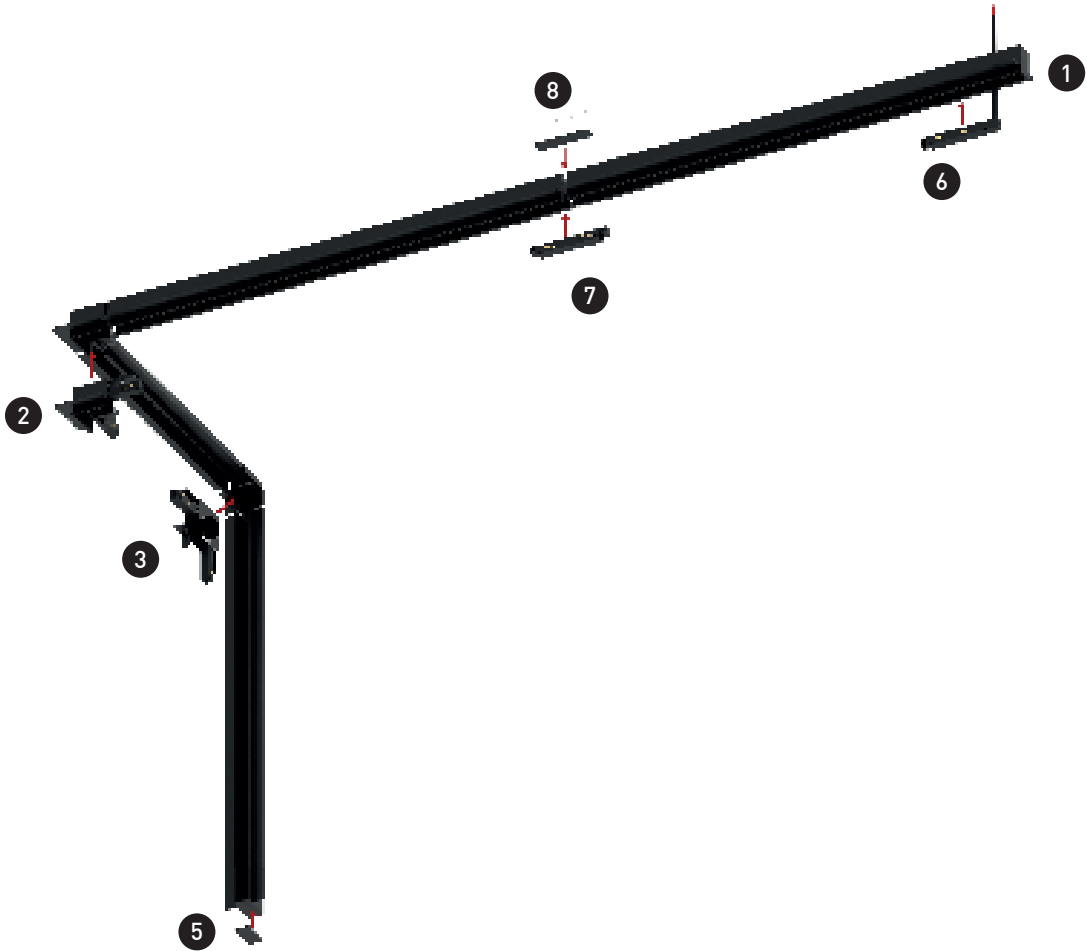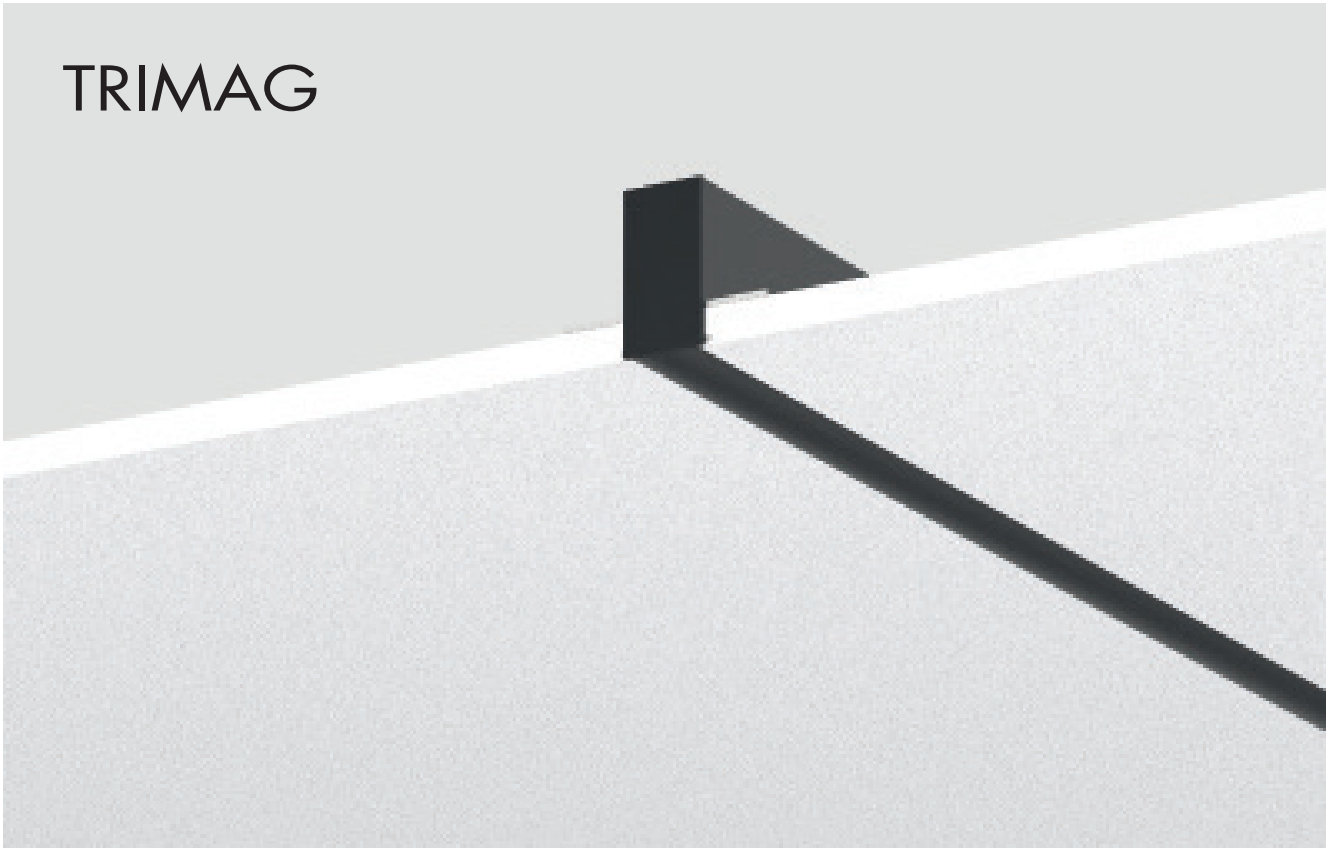

RECMAG

1		7IM50110-01 1m. Empotrable Magnetic track. Black/Negro/Noir 7IM50110-90 1m. Empotrable Magnetic track. T. White/Blanco T./Blanc T. 7IM50120-01 2m. Empotrable Magnetic track. Black/Negro/Noir 7IM50120-90 2m. Empotrable Magnetic track. T. White/Blanco T./Blanc T. 7IM50130-01 3m. Empotrable Magnetic track. Black/Negro/Noir	End Cap withouth hole (Included 2 pz)	
2		7IM501CL-01 Magnetic System track 7IM501CL-90 Low Voltage 48V. Corner connector included	01 - Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	
3		7IM501CP-01 Magnetic System track 7IM501CP-90 Low Voltage 48V. Corner connector included	01 - Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	
4		7IM501CT-01 Magnetic System track 7IM501CT-90 Low Voltage 48V. Corner connector included.	01 - Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	
5		7IM501T1-01 End Cap 7IM501T1-90 withouth hole	01 - Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	
6		7IM7PS00-01 Power supply Connector 7IM7PS00-90 (page 108)	01 - Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	
7		7IM7MC00-01 Junction Connector 7IM7MC00-90 (page 108)	01 - Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	
8		7IM7EN00-01 Connetor Plate (page 109)	01 - Black/Negro/Noir	
9		7IM501-S Embedding accessory Recommended 2 per 1m		
		7IM7TC10-01 Cover 1m 7IM7TC10-90 (page 109)	01 - Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	
		3100-2212-048V Power supply External 3150-2212-048V (page 106) 3250-2212-048V	100W 150W 250W	
		3100-1248V 3100-1248V-90 3150-1248V 3150-1248V-90 3230-1248V 3230-1248V-90 Power supply Integrado (page 107)	100W 150W 230W Black/Negro/Noir 90 - T. White/Blanco T./Blanc T.	

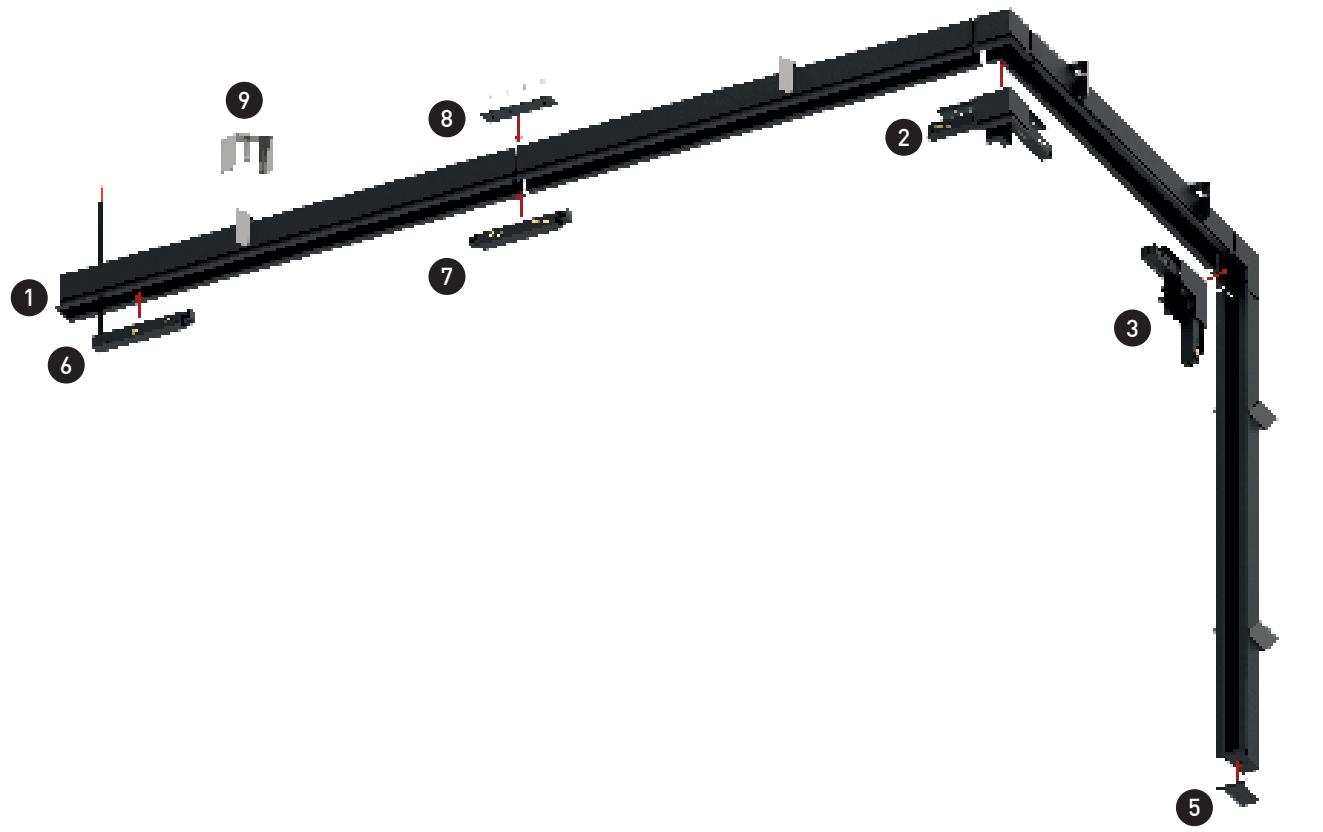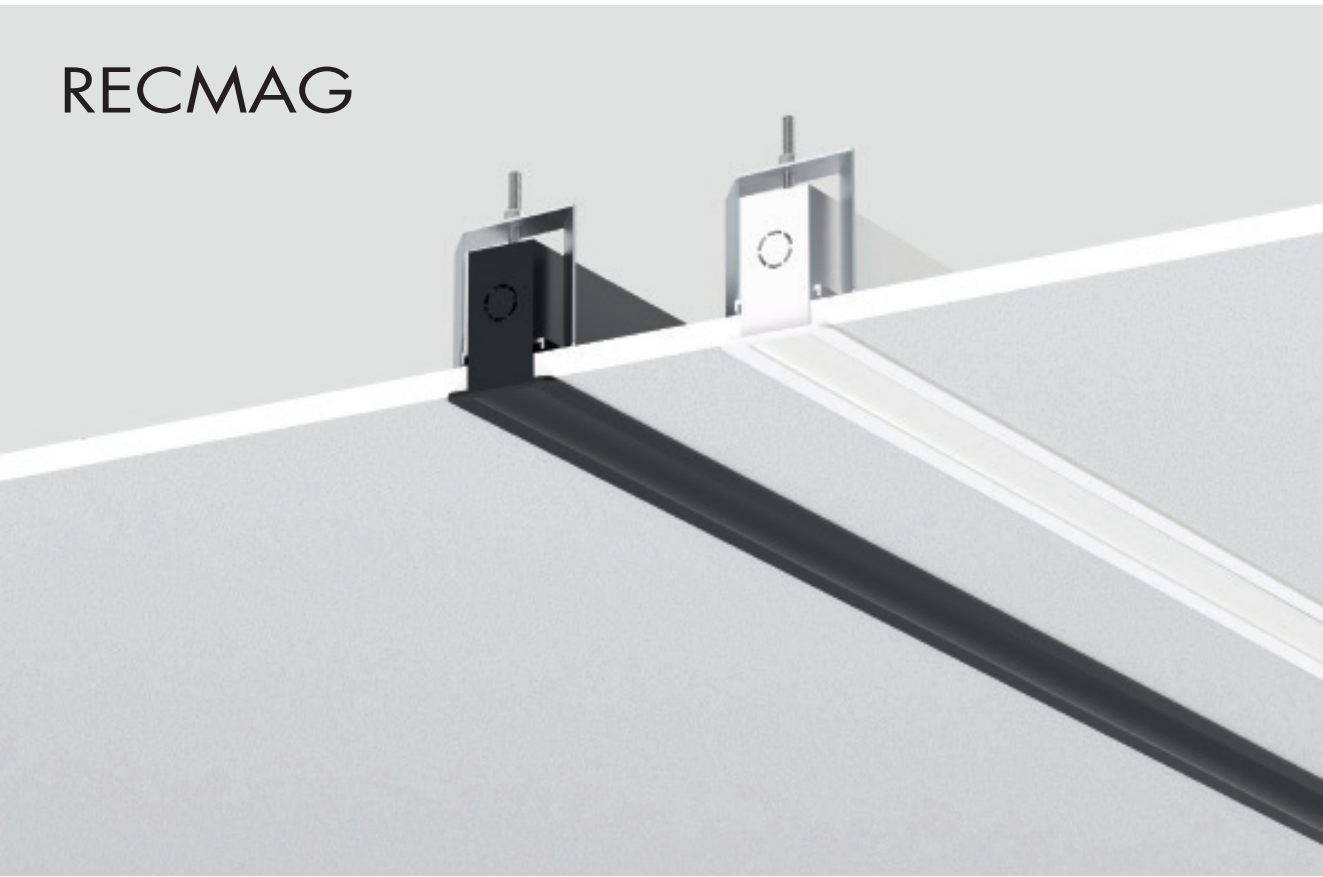



Power Supply 48V. External



Reference	Description	Waranty	Size (mm)	Packaging
3100-2212-048V	100W Power Supply 48V – 2100mA – ON/OFF – Clase II	5 Years/Años/Années	350x30x15	1/35
3150-2212-048V	150W Power Supply 48V – 3125mA – ON/OFF – Clase II	5 Years/Años/Années	350x30x15	1/35
3250-2212-048V	250W Power Supply 48V – 5210mA – ON/OFF – Clase II	5 Years/Años/Années	400x40x20	1/30

They are those that are connected to the rail through a specific connector and that are placed away from it, the necessary distance so that they can be placed in a junction box, a false ceiling, etc. They are similar to those used for installations with 24Vdc LED strips, but with the difference that, in this case, the voltage supplied is 48Vdc.

C Power Supply Connector necessary

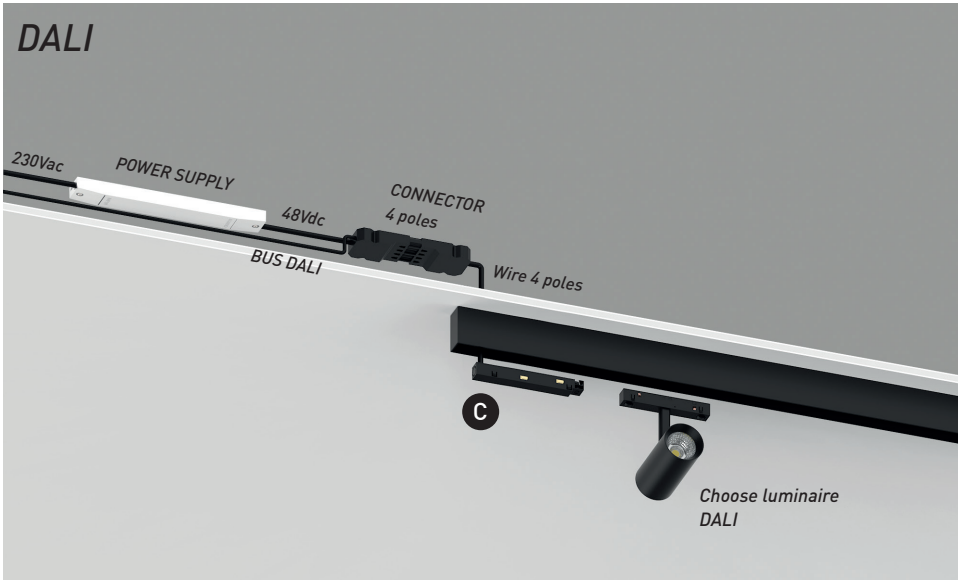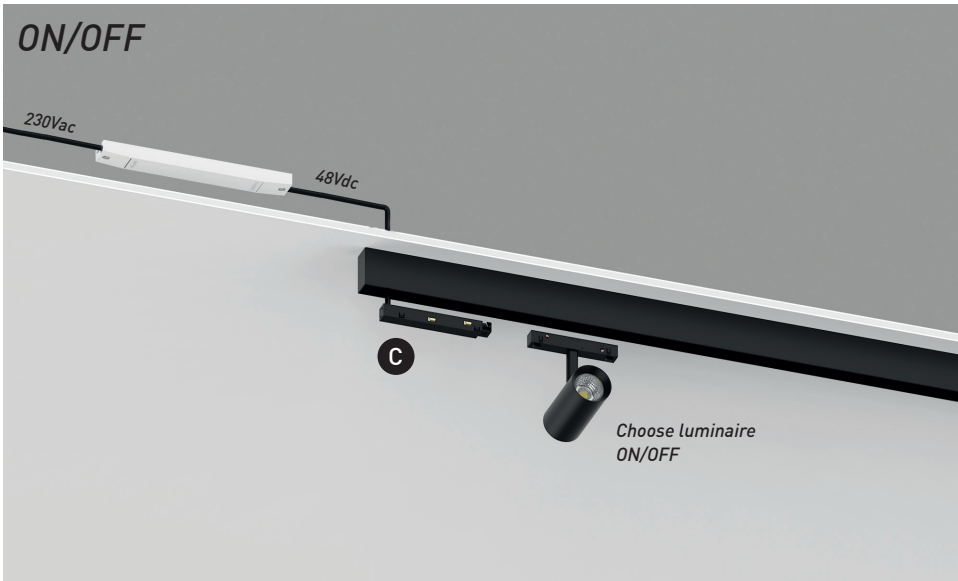



La potencia del driver seleccionado debe ser superior a la suma de las luminarias con un margen del 20%.
The power of the driver selected must be higher than the sum of the luminaires with a margin range of 20%.
La puissance du driver choisi doit être supérieure à la somme des luminaires avec une marge de 20%.

Power Supply 48V. Integrado



These are those that are connected directly to the rail, occupying part of it, without the need for additional connectors. Their operation is similar to that of the sources for external use, but their main difference lies in the ease of connection, as they do not need additional connectors or spaces outside the rail to house them.

C Power Supply Connector necessary

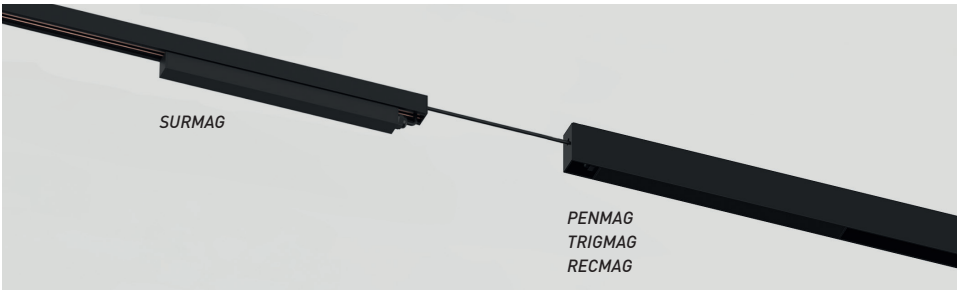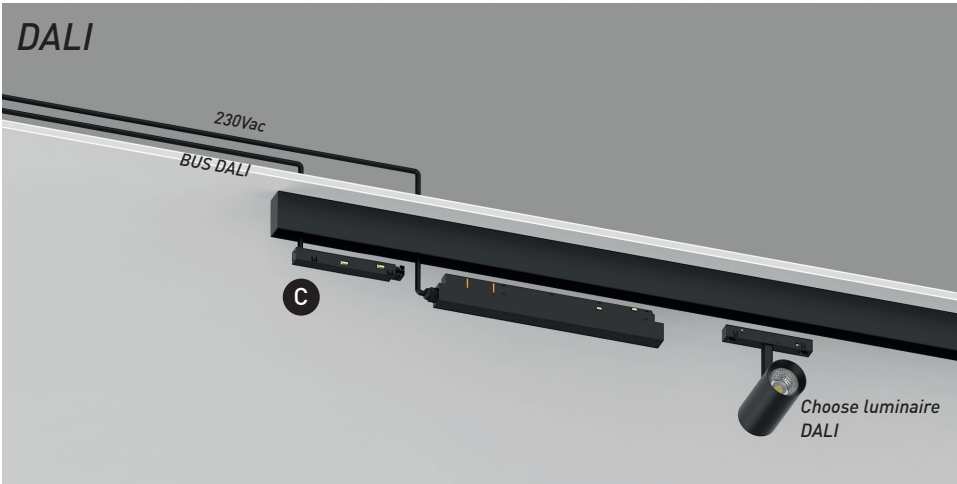


La potencia del driver seleccionado debe ser superior a la suma de las luminarias con un margen del 20%.
The power of the driver selected must be higher than the sum of the luminaires with a margin range of 20%.
La puissance du driver choisi doit être supérieure à la somme des luminaires avec une marge de 20%.

CONNECTORS




7IM7PS00-01 Black / Negro / Noir
7IM7PS00-90 T. White/Blanco Téc. /Blanc T.

Magnetic System track
Low Voltage 48V
Connector Power supply




7IM7MC00-01 Black / Negro / Noir
7IM7MC00-90 T. White/Blanco Téc. /Blanc T.

Magnetic System track
Low Voltage 48V
Connector junction



7IM7FL00-01 Black / Negro / Noir
7IM7FL00-90 T. White/Blanco Téc. /Blanc T.

Magnetic System track
Low Voltage 48V
Connector flexible corner

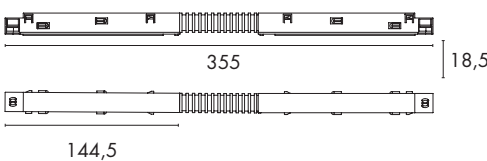

CORNER CONNECTORS



PENMAG

7IM202CL-01 Black/Negro/Noir
7IM202CL-90 T. White / Blanco T. / Blanc T.



7IM202CP-01 Black/Negro/Noir
7IM202CP-90 T. White / Blanco T. / Blanc T.



7IM202CT-01 Black/Negro/Noir
7IM202CT-90 T. White / Blanco T. / Blanc T.



SURMAG

7IM201CL-01 Black/Negro/Noir



7IM201CP-01 Black/Negro/Noir



7IM201CT-01 Black/Negro/Noir



TRIMAG

7IM601CL-01 Black/Negro/Noir



7IM601CP-01 Black/Negro/Noir



7IM601CT-01 Black/Negro/Noir



RECMAG

7IM501CL-01 Black/Negro/Noir
7IM501CL-90 T. White / Blanco T. / Blanc T.




7IM501CP-01 Black/Negro/Noir
7IM501CP-90 T. White / Blanco T. / Blanc T.



7IM501CT-01 Black/Negro/Noir
7IM501CT-90 T. White / Blanco T. / Blanc T.

Accessories



Cover. SURMAG

7IM2TC10-01 Black / Negro / Noir.


Cover 1m



Cover. RECMAG, TRIMAG, PENMAG

7IM7TC10-01 Black / Negro / Noir.
7IM7TC10-90 Technical White / Blanco Técnico / Blanc Tec.

Cover 1m



SUSPENSION ACCESSORIES. SURMAG, PENMAG

7IM4PC00-01	Black/Negro / Noir.	Wire de 1.5m Length
7IM4PC00-01-3M	Black/Negro / Noir.	Wire de 3m Length
7IM4PC00-90	Technical White / Blanco Técnico / Blanc Tec.	Wire de 1.5m Length
7IM4PC00-90-3M	Technical White / Blanco Técnico / Blanc Tec.	Wire de 3m Length

Accesorio suspensión para base de techo con cadenas y soporte.
Suspension accessory for ceiling base with chains and bracket.
Accessoire de suspension pour base de plafond avec chaînes et support.



SUSPENSION ACCESSORIES. Wire ON/OFF. SURMAG, PENMAG

7IM4PC01-01	Black/Negro / Noir.	Wire de 1.5m Length
7IM4PC01-01-3M	Black/Negro / Noir.	Wire de 3m Length
7IM4PC01-90	Technical White / Blanco Técnico / Blanc Tec.	Wire de 1.5m Length
7IM4PC01-90-3M	Technical White / Blanco Técnico / Blanc Tec.	Wire de 3m Length

Accesorio suspensión para base de techo con cadenas y soporte.
Suspension accessory for ceiling base with chains and bracket.
Accessoire de suspension pour base de plafond avec chaînes et support.



SUSPENSION ACCESSORIES. Wire DALI. SURMAG, PENMAG

7IM4PCD1-01	Black/Negro / Noir.	Wire de 1.5m Length
7IM4PCD1-01-3M	Black/Negro / Noir.	Wire de 3m Length
7IM4PCD1-90	Technical White / Blanco Técnico / Blanc Tec.	Wire de 1.5m Length
7IM4PCD1-90-3M	Technical White / Blanco Técnico / Blanc Tec.	Wire de 3m Length

Accesorio suspensión para base de techo con cadenas y soporte.
Suspension accessory for ceiling base with chains and bracket.
Accessoire de suspension pour base de plafond avec chaînes et support.



PLATE. RECMAG, TRIMAG, SURMAG, PENMAG

7IM7EN00-01
Pletina CONNECTORa para Magnetic track
Suspension accessory for ceiling base with chains and bracket.
Plaque de connexion pour la piste magnétique

