

CH22x58 gG 40A/690V



Specifications

ETI Code	002651046
Description	CH22x58 gG 40A/690V
Class name	Fuse link
Rated current (A)	40
Type	CH
Size	22x58
Characteristics	gG
Rated AC voltage (V)	690
Breaking capacity AC (kA)	120
Power dissipation (W)	4,3
Standards	IEC 60269-1, IEC 60269-2
Application	For cable protection

[Online product page](#) 

Other documentation


[Technical data catalogue](#)
[3D Model](#)
[Instruction manual](#)
[CE declaration](#)
[Eplan file](#)

ETIM international clasification


Classification	EC000035
Class name	Miniature fuse
Voltage type	AC
Rated current	40A
Rated voltage	690V

Melting energy characteristics


Melting energy
characteristics I^2t
CH22

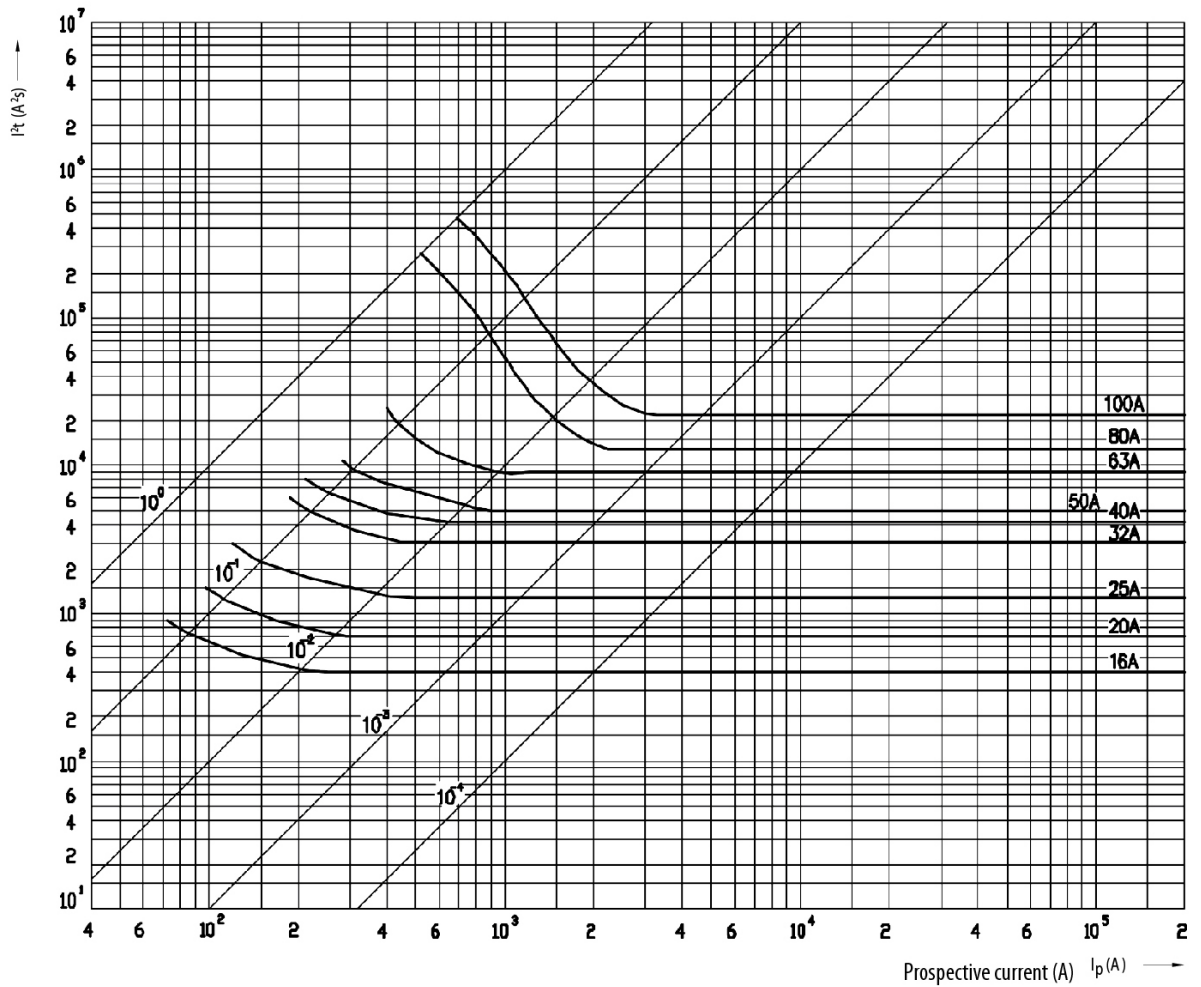

Characteristics

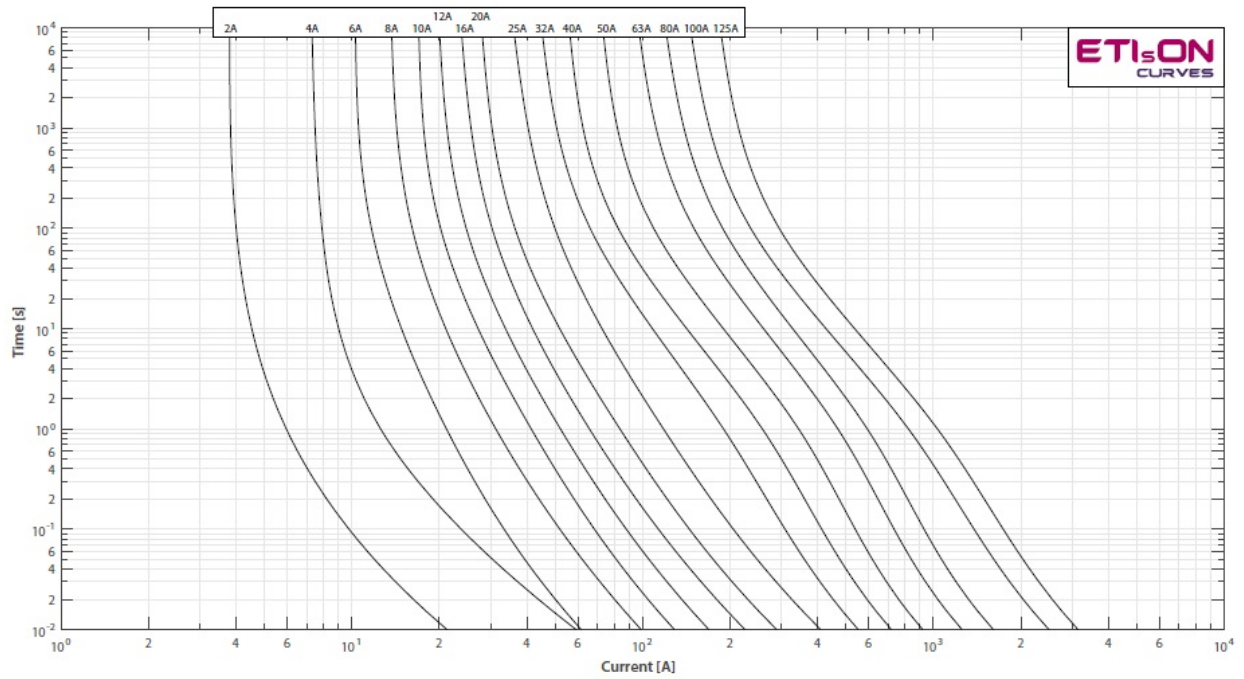

Dimension drawing

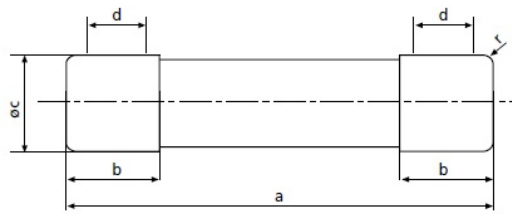

size	a	b _{max}	c	d _{min}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

Cut-off current characteristics

Cut-off current characteristics, CH22 gG

